

# Specifications

## OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates upward through a 23° arc. The rotation angle of temperature is 100°. Maximum hot through 50° in clockwise direction. Minimum cold through 50° in counterclockwise

## FLOW


- Hand shower is limited to 2.5gpm(9.5L/min) at 80psi
- Bathtub spout is minimum to 2.4gpm(9.0L/min) at 20psi

## CARTRIDGE



- Ceramic disk cartridge

## STANDARDS

- Third party certified to meet ASME A112.18.1 all applicable requirements referenced therein

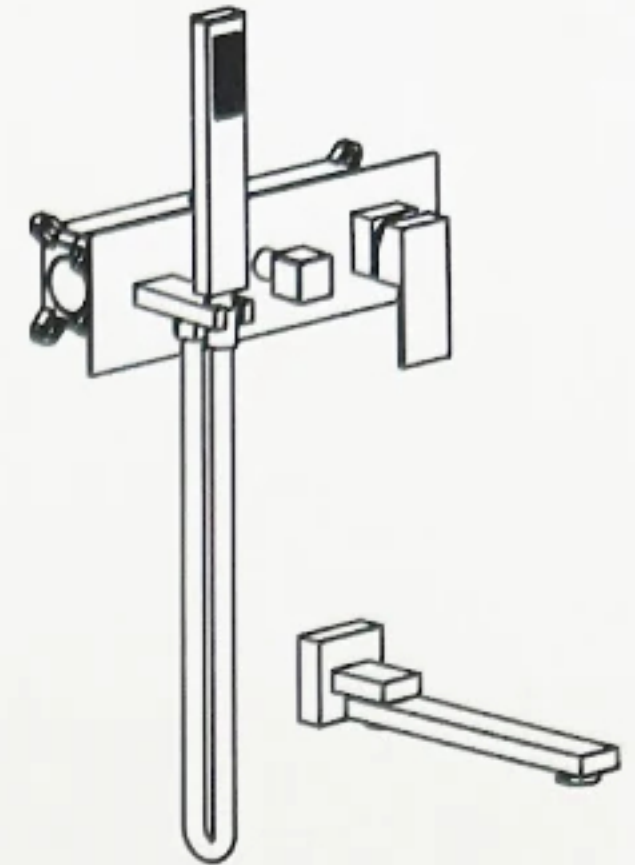

Concealed Shower Set

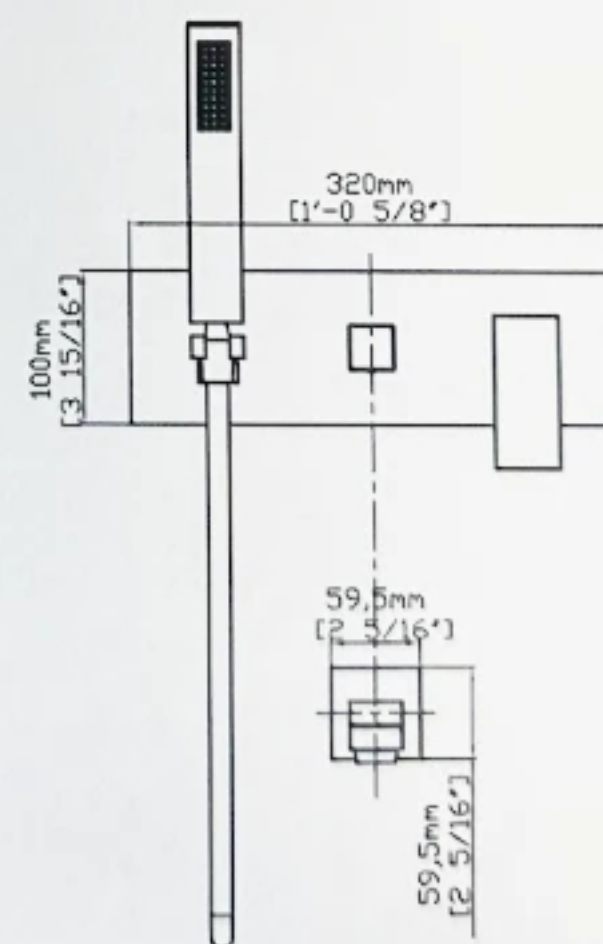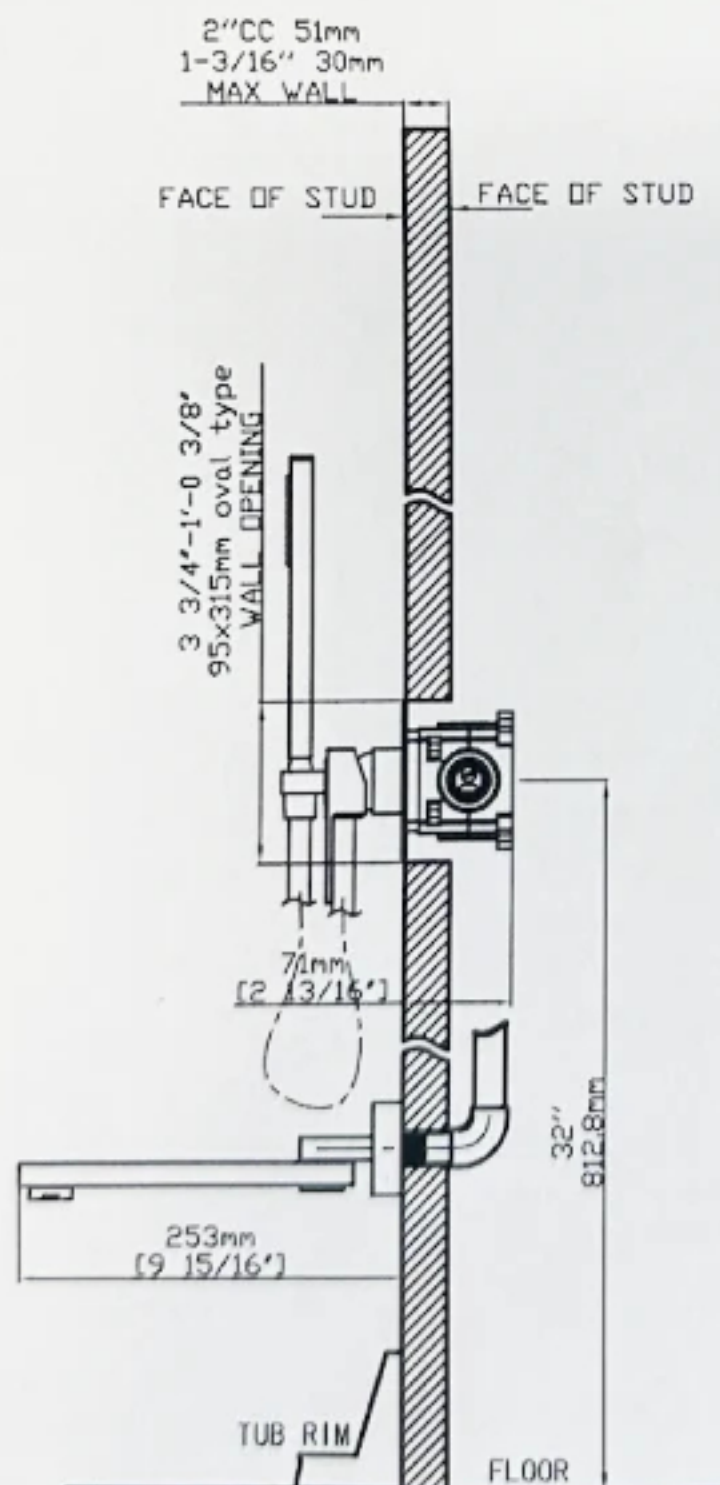

Note: Dimensions are for reference only. Detailed information is in accordance with the final product.