


Two Function Concealed Shower Set Installation


INSTALLATION MANUAL Tools You Will Need :



Adjustable wrench

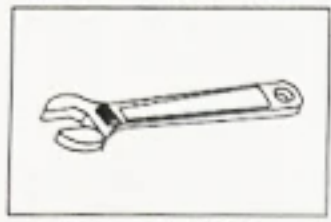

Hexagon wrench

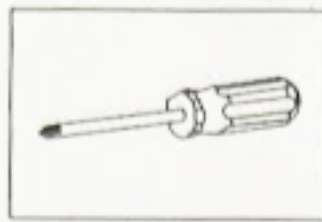

Philips Screwdriver




Pipe Tape


Notes before installation :

1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.


⚠ All valves pass air and water testing during manufacture. If request air test before installation, MUST under the guide of professional plumber, and air pressure DO NOT over 145PSI (=10KG).

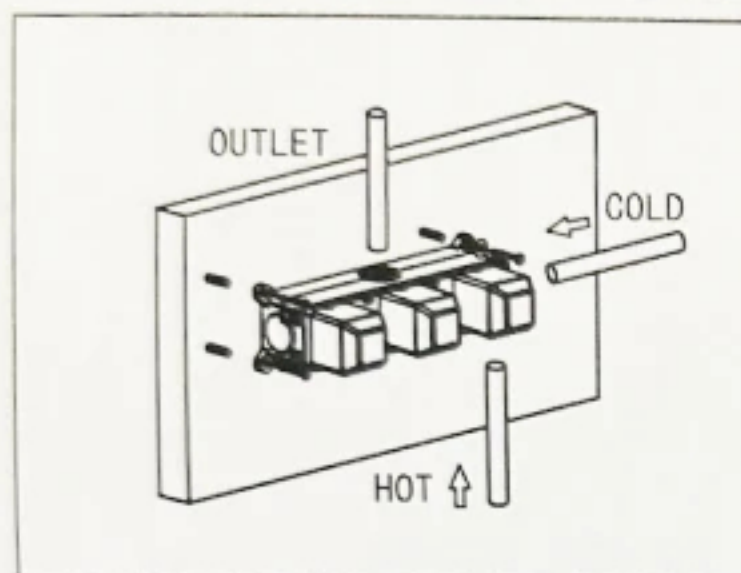


1. Confirm the installed place of the valve and fixed on the wall.

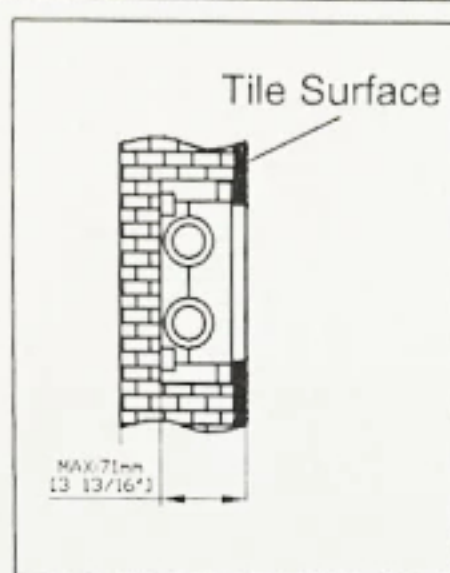


2. Laid the valve into the solid wall, the suitable depth is 71mm.

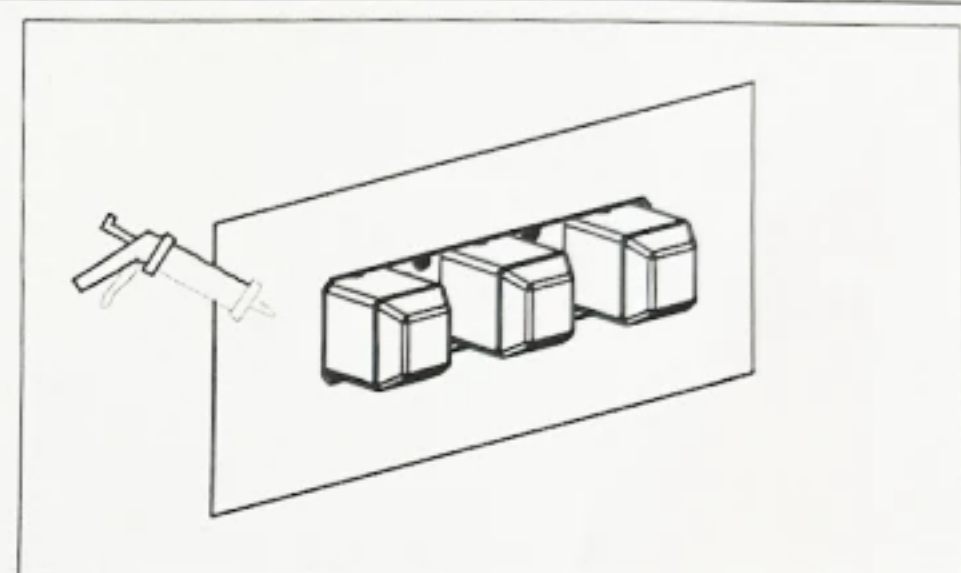


3. Use glue along the pre-install box to keep it stable.

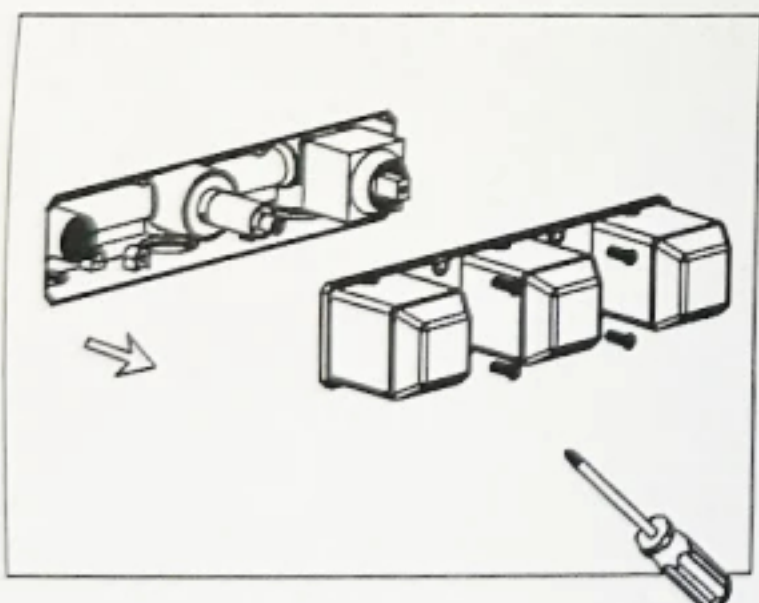


4. Loosen the screw and remove protect cover.

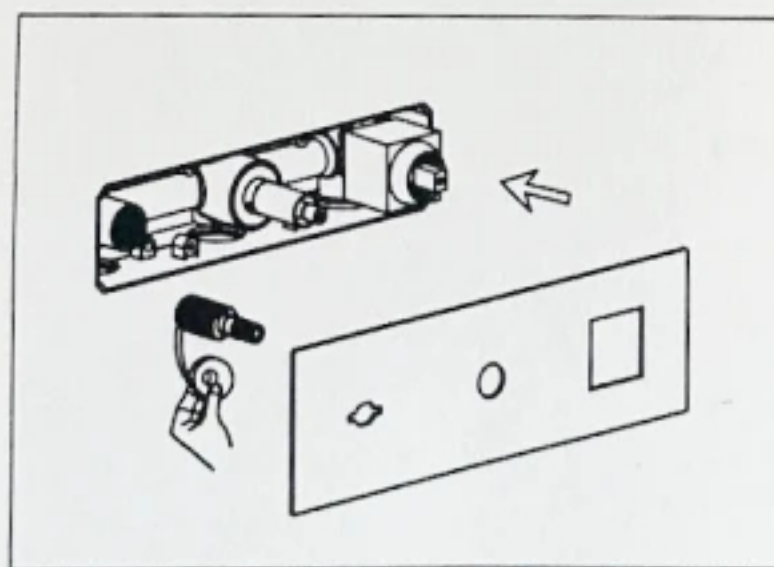


5. Warp the thread of spout with teflon tape. Lock the deck plate into the body and ceiling to the wall.

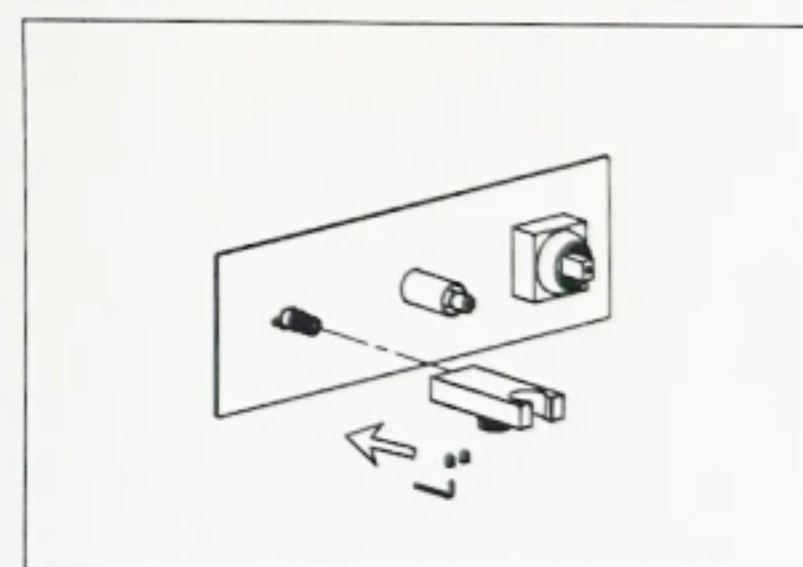

6. Screw-in to the inlet pipe inside the wall with the Hexagon wrench.

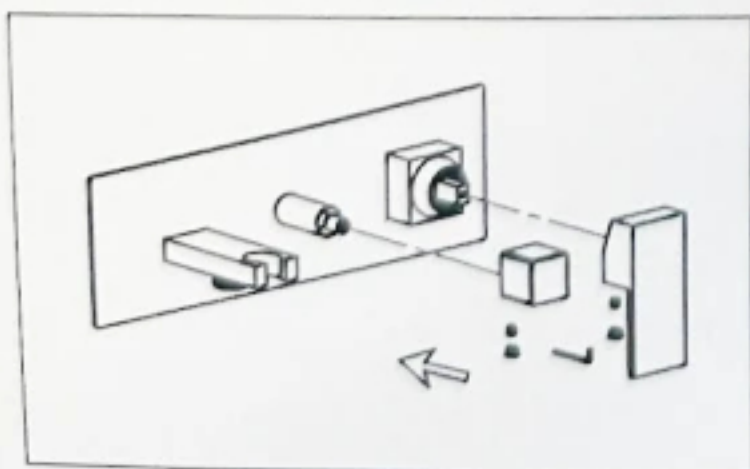

7. Put on the handle, then tight the screw.

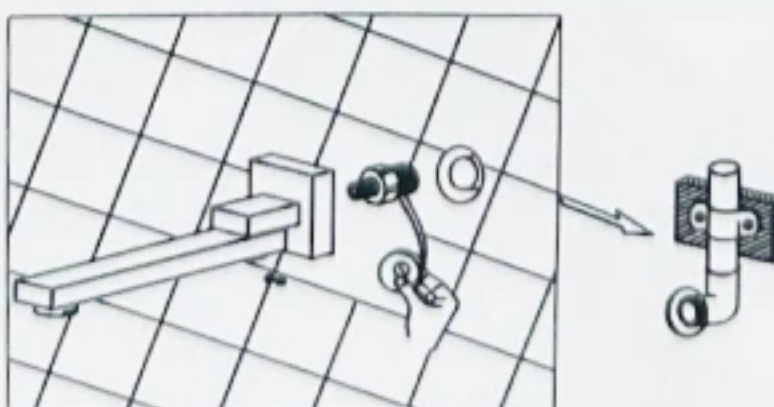

8. Warp the thread of connector with teflon tape (ensure it must warp clockwise). Insert the spout inside the wall.